



ES-C Series

The Arc Corner Option



High end customization



Front/Rear access



Remote control



High brightness



wide viewing angle




Ultra Guard



Top View




Back View

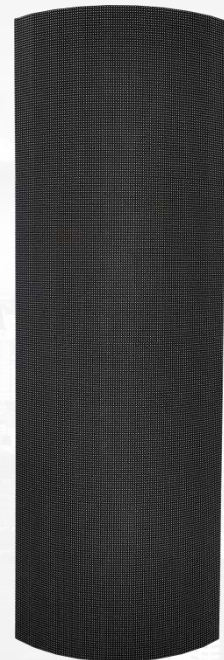


Front View


The Arc Corner Part

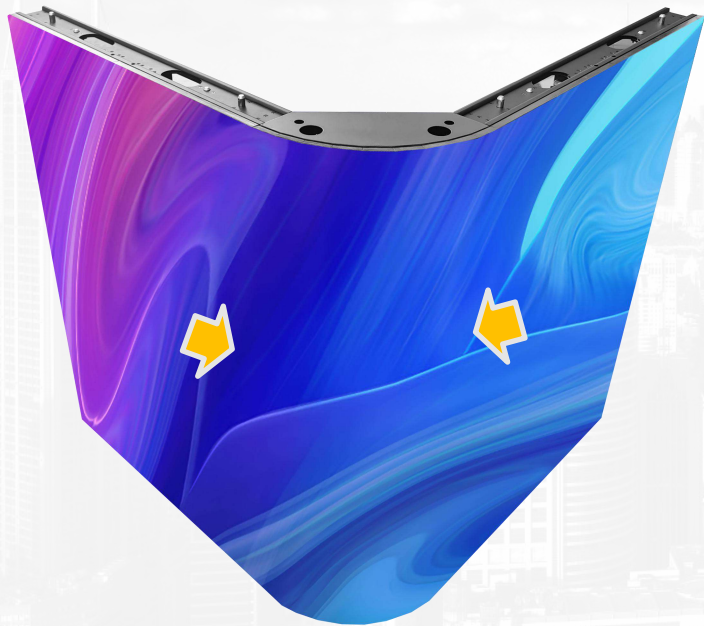


Cabinet Size

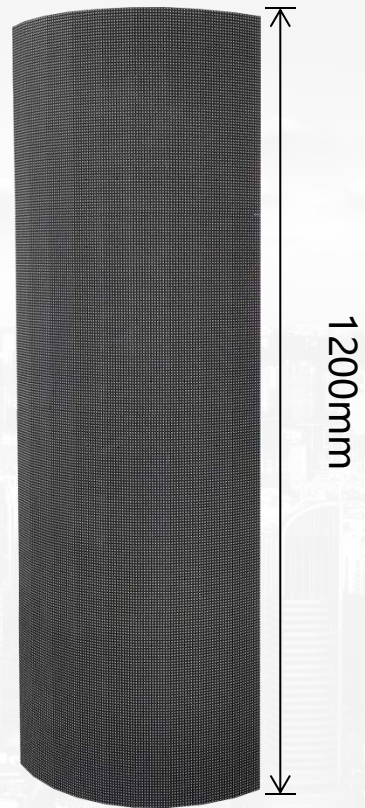


Module Size

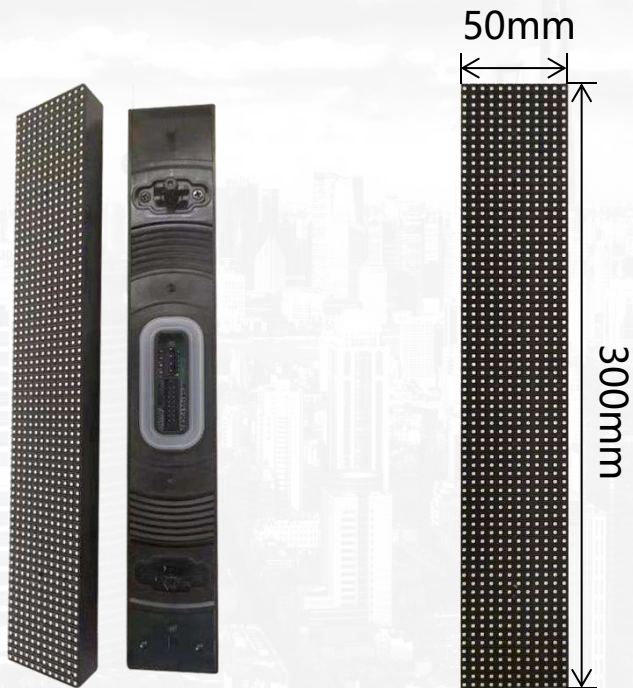

Maintenance

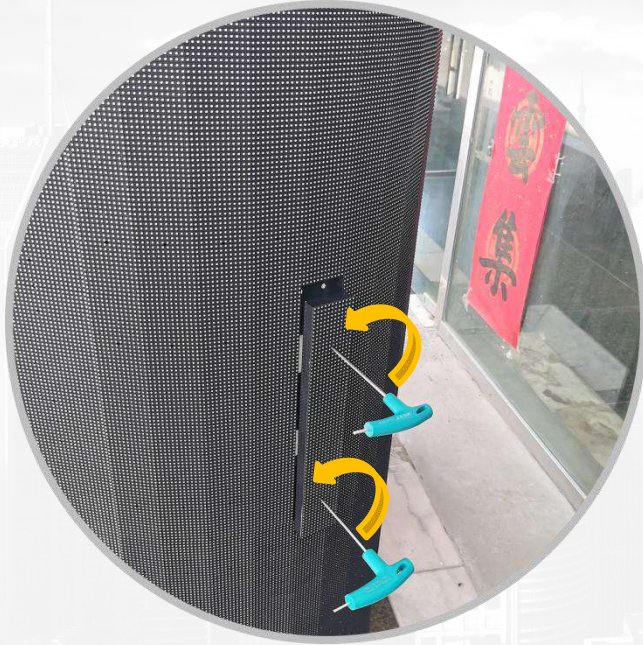

Front-side maintenance

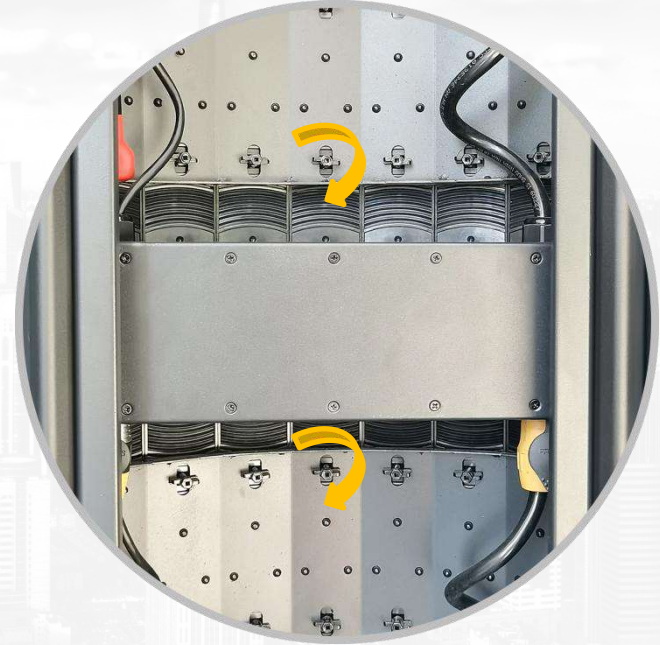

Rear-side maintenance



IP65 Waterproof for both front
and back side



seamless splicing



High refresh rate



High refresh rate



Low refresh rate

High grey scale



Hig grey scale



Low grey scale

160° Super wide viewing angle

Perfect presentation of images from any angle



CASES



Pixel Pitch

P3.125

P4.16

P5

P6.25

P8.33

P10

SMD type	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	102400	57600	40000	25600	14400	10000
Module resolution	16X96	12X72	10X60	8X48	6X36	5X30
Module dimension	50X300	50X300	50X300	50X300	50X300	50X300
Panel size (mm)	450X900/1200	450X900/1200	450X900/1200	450X900/1200	450X900/1200	450X900/1200
Panel resolution (W×H)	144X288/144X384	108X216/108X288	90X180/90X240	72X144/72X192	54X108/54X144	45X90/45X120
Module quantity (W×H)	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4
Box weight (kg)	20/25	20/25	20/25	20/25	20/25	20/25
Maintenance mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Cabinet material	Aluminum box	Aluminum box	Aluminum box	Aluminum box	Aluminum box	Aluminum box
Brightness (nits)	5000	6500	6500	6500	6500	6500
Color temperature (K)	1000-18500optional	1000-18500optional	1000-18500optional	10018500optional	1000-18500optional	1000-18500optional
Viewing angle (V/H)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Flatness (mm)	0.1	0.1	0.1	0.1	0.1	0.1
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame-changing frequently	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	Static 1/16 scale	Static 1/6 scale	Static 1/6 scale	Static 1/6 scale	Static 1/3 scale	Static 1/2 scale
Grey scale	65536	65536	65536	65536	65536	65536
Refresh rate	3840	3840	3840	3840	3840	3840
Max power consumption (w/m ²)	780	780	780	780	780	780
Avg. power consumption (w/m ²)	200-300	200-300	200-300	200-300	200-300	200-300
protection grade	IP65	IP65	IP65	IP65	IP65	IP65
Electric power requirements	AC90-264V,47-63Hz					
Working Temp/Humidity(/RH)	-20~60 /10%~85%					
Storage Temp/Humidity(/RH)	-20~60 /10%~85%					
Cert	CCC/CE/RoHS/FCC/CB/TUV/IEC					



THANKS