



Indoor LED Rental Screen

XR Series


Juhui Vision



Arc-shape Adjustable



Front/rear Maintenance



High-precision Structure




Quick Installation



Wide Viewing-angle




High Contrast Ratio

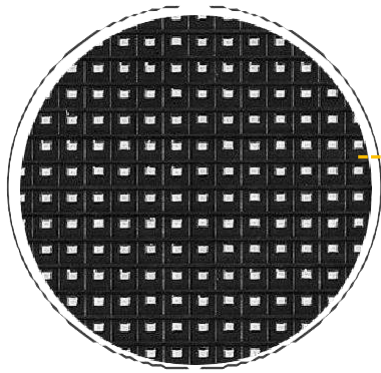

Front Viewing

Mask with special grain pattern
processing for promoting contrast ratio

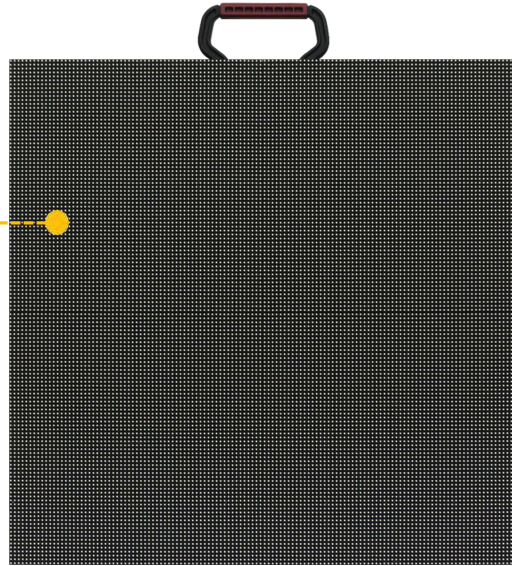




Cabinet back

Light-weight, save transportation and installation cost.

Multi-handles, make installation easier.

Corner protection, protects LED in safe.

Dimension

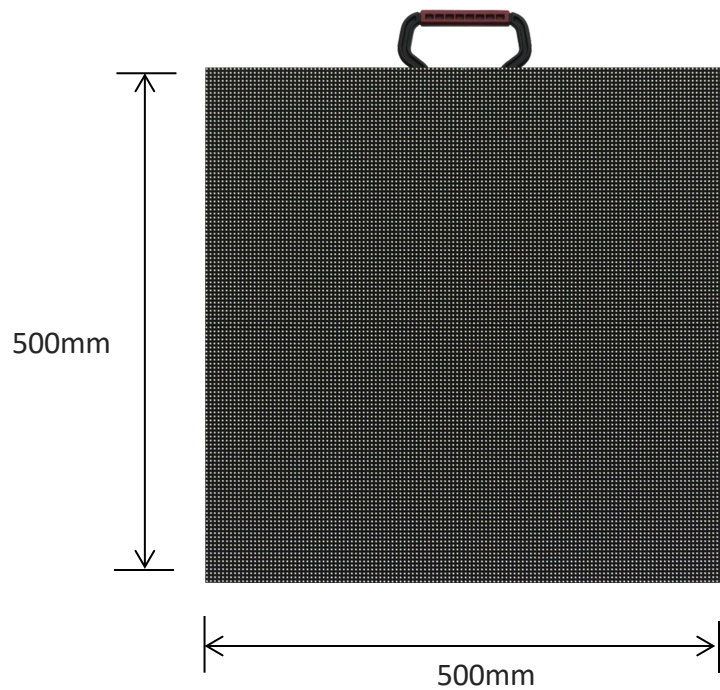




Lighter & Thinner

500X500

8KG

Color Enhancement

Unique color enhancement technology ensures that each color is clearly visible, making the visual performance more realistic

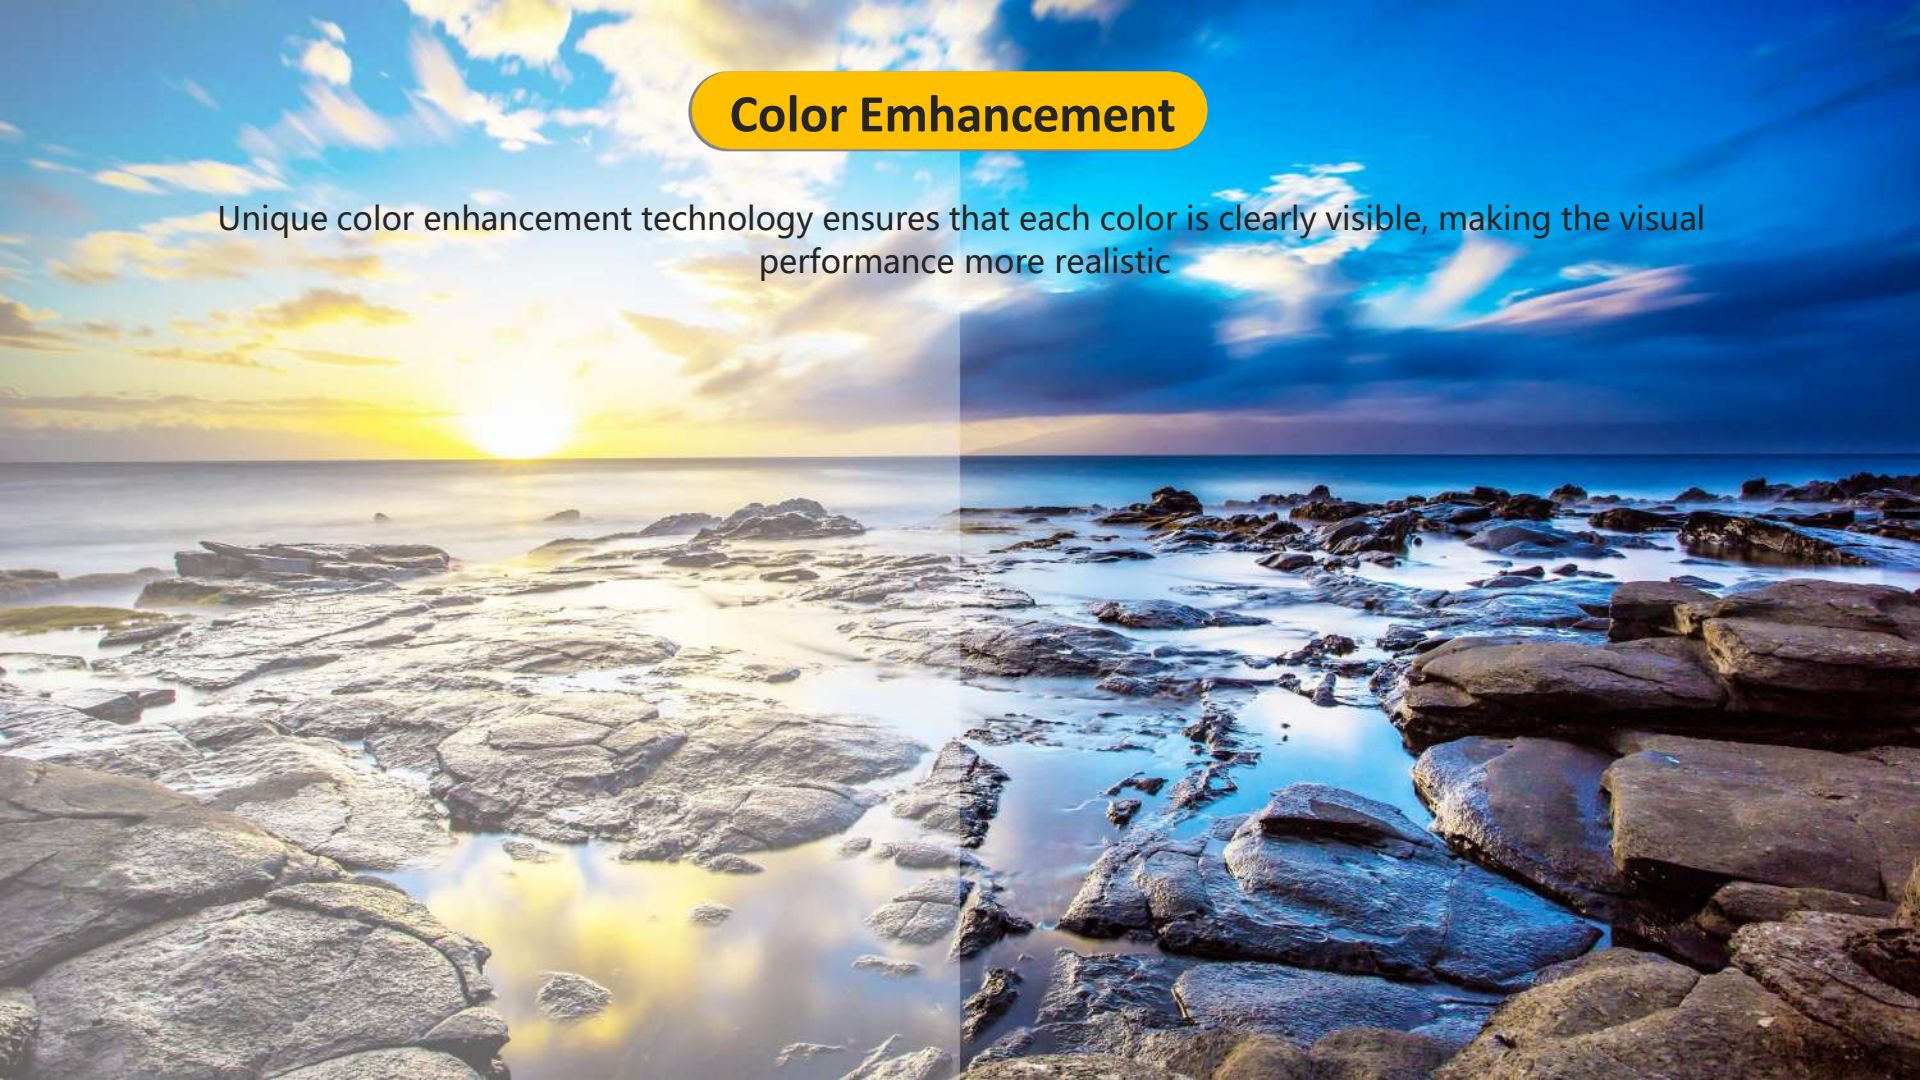

High refresh rate



High refresh rate



Low refresh rate

High grey scale



Hig grey scale



Low grey scale

160° Super wide viewing angle

Perfect presentation of images from any angle



Seamless Splicing

Die-casting Aluminium Cabinet structure with
CNC high-precision processing

(Flatness of Cabinet $\leq 0.1\text{mm}$)

HUB connection with high-integrated power
box

Plug&play, hot-swapping

Both front/rear side maintenance

Buckle locks make the power box assembling&disassembling
easier



Variability Installation


As professional LED rental products, convenience and variability of installations are one of the key points for your rental businesses. It can be assembled in most of standardized sizes with various installation ways, such as hanging installation, arc installation, stacking installation, etc.




Hanging



Arc-shapes

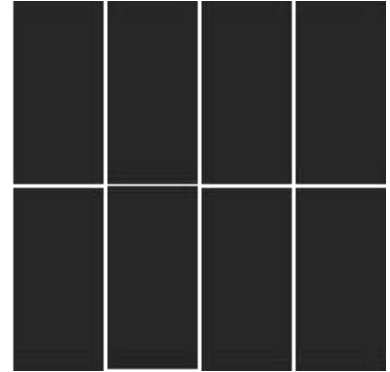

Stacking

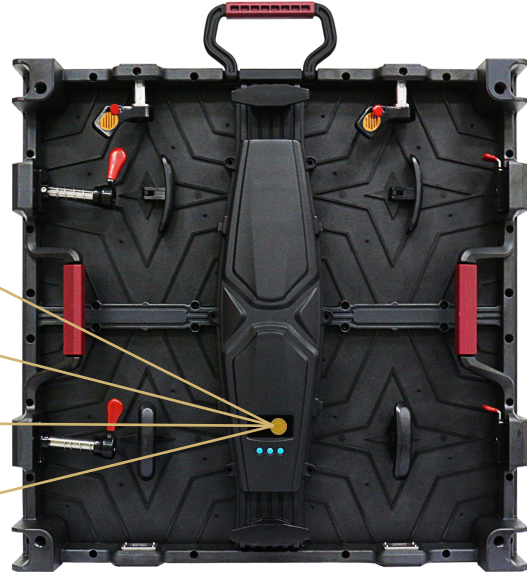

Temperature

Voltage

Total Time


Working time

Smart Monitoring LCD panel

Information system management platform



Cabinet Structure

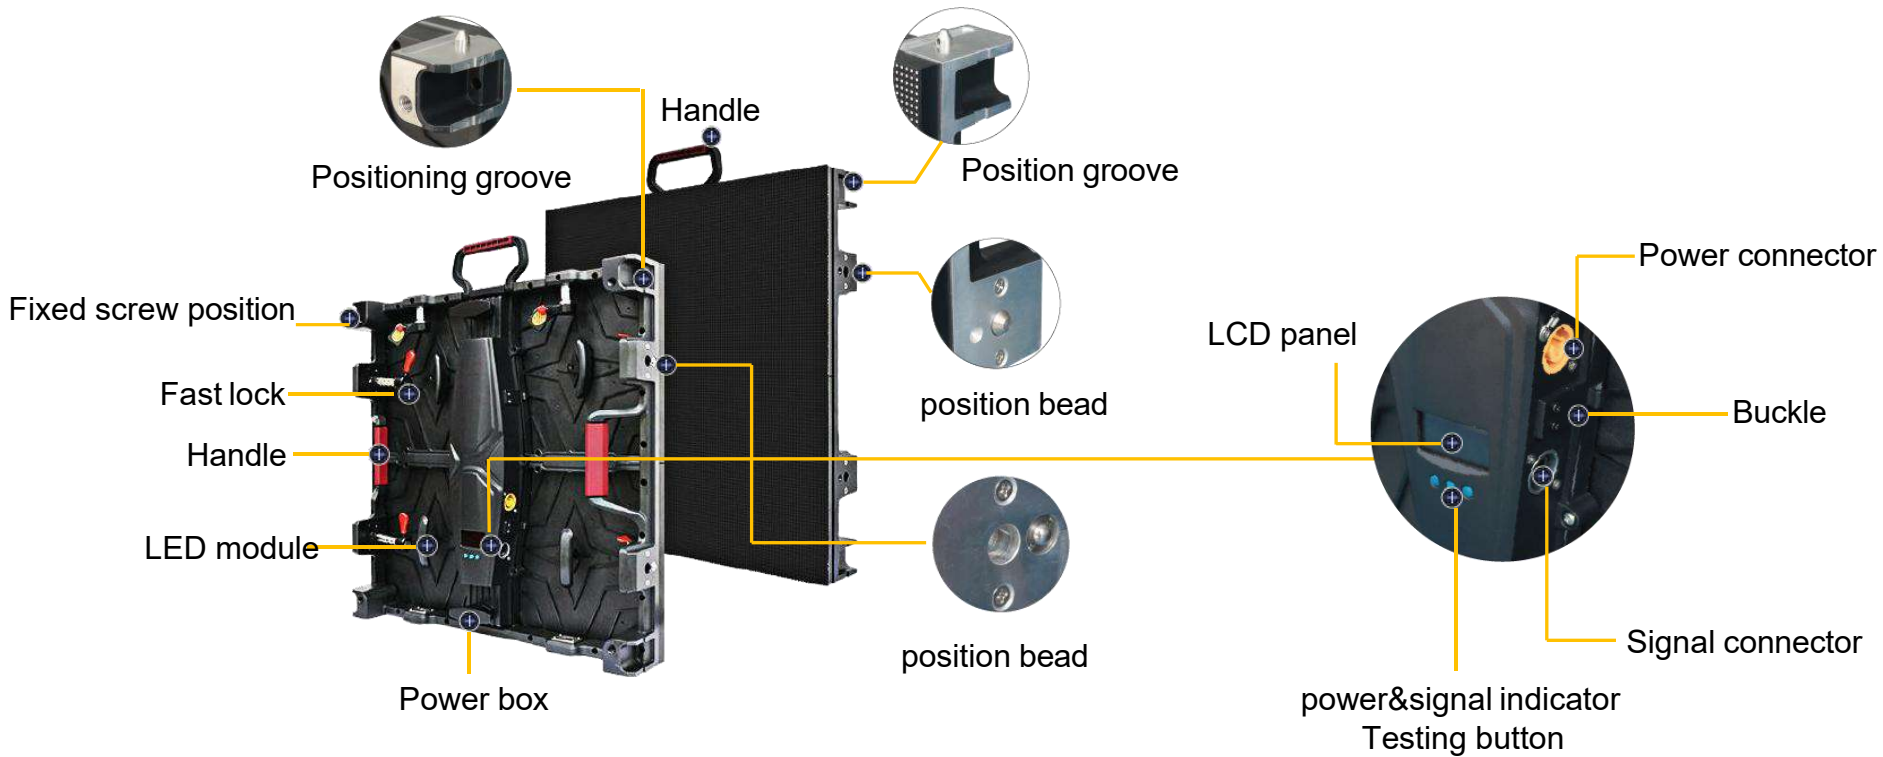

Pixel Pitch

P1.95

P2.315


P2.604

LED Type	SMD1515	SMD1515	SMD1515
Physical density(Dot/sqm)	262144	186624	147456
Module resolution	128X128	108X108	96X96
Module size(mm)	250X250	250X250	250X250
Cabinet size(mm)	500X500X84.5	500X500X84.5	500X500X84.5
Cabinet resolution	256X256	216X216	192X192
Module QTY(WXH)	2X2	2X2	2X2
Cabinet weight(kg)	8	8	8
Maintenance	Front/rear	Front/rear	Front/rear
Cabinet material	Die-casting Aluminum	Die-casting Aluminum	Die-casting Aluminum
Brightness(Nits)	≥1500	≥1500	≥1500
Color temperature(K)	1000-18500 Adjustable	1000-18500 Adjustable	1000-18500 Adjustable
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°
Viewing distance	2-50m	3-50m	3-50m
Contrast ratio	10000 : 1	10000 : 1	10000 : 1
Frame frequency	60/120	60/120	60/120
Drive mode	1/8 scan	1/25 scan	1/8 scan
Grey level	16bit	16bit	16bit
Refresh rate(Hz)	7680	7680	7680
Max. power consumption(W/sqm)	920	920	920
Avg. power consumption(W/sqm)	200-300	200-300	200-300
Protection level	IP31	IP31	IP31
Power input		AC90-264V,47-63Hz	
Working temperature/humidity(°C/RH)		-20~60°C/10%~85%	
Storage temperature/humidity(°C/RH)		-20~60°C/10%~85%	
Certification		CCC/CE/RoHS/FCC/CB/TUV/IEC	

CASES



CASES

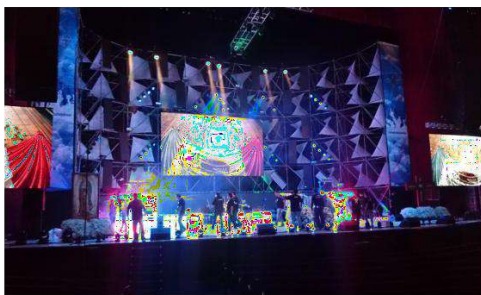



THANKS