



Indoor fixed installation

T3 Series



High definition



Light weight



Front access



Seamless joint



Wide viewing angle





Hig refresh rate



High grey scale



Quick installation

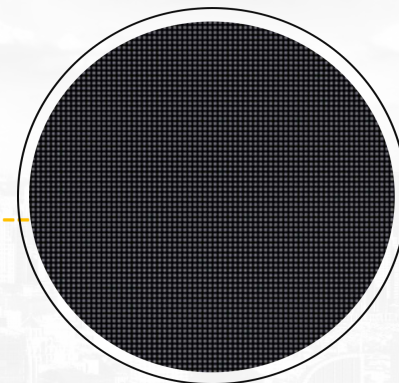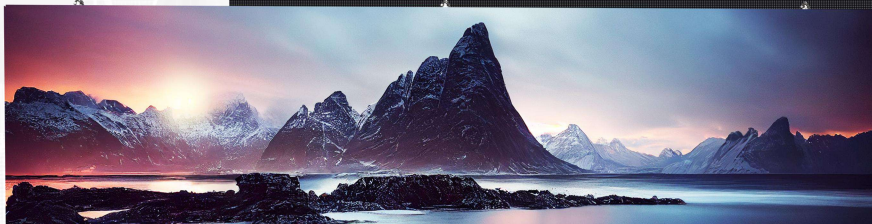

Front side

High contrast corrugated light absorbing mask achieves high contrast



Back side

Cabinet design looks neat, and no cables connection between cabinets

Cabinet size

500X250X33mm




750X250X33mm



1000X250X33mm



Cabinet weight

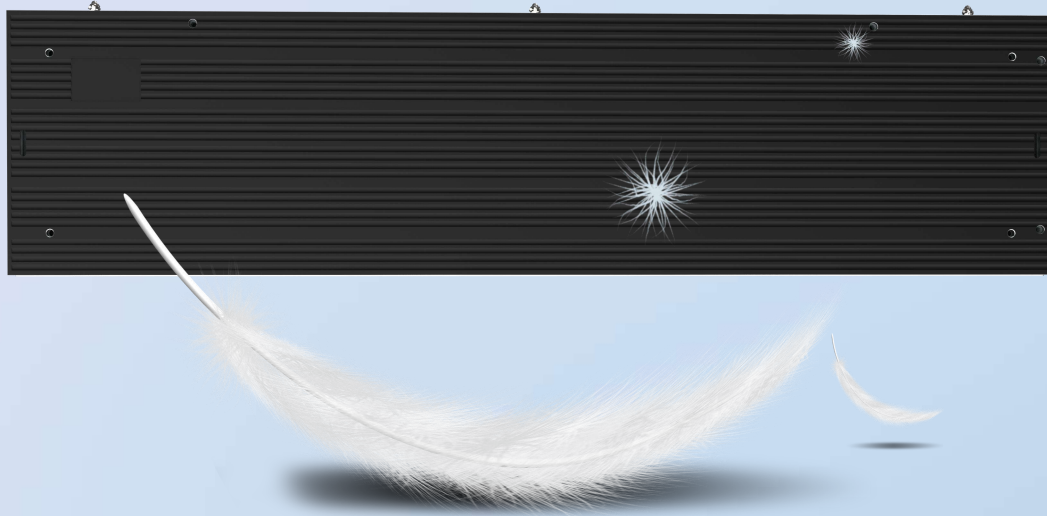

Cabinet weight :2.9kg/4.5kg/5.8kg

Cabinet is lighter and slimmer, it reduces the transportation cost and installation labor cost




Front access

Full front access makes the maintenance is easier

Hot swapping · wireless connection

- Hardware connection between modules and cabinet is more stable
- Aluminum cabinet has better heat dissipation performance

Module

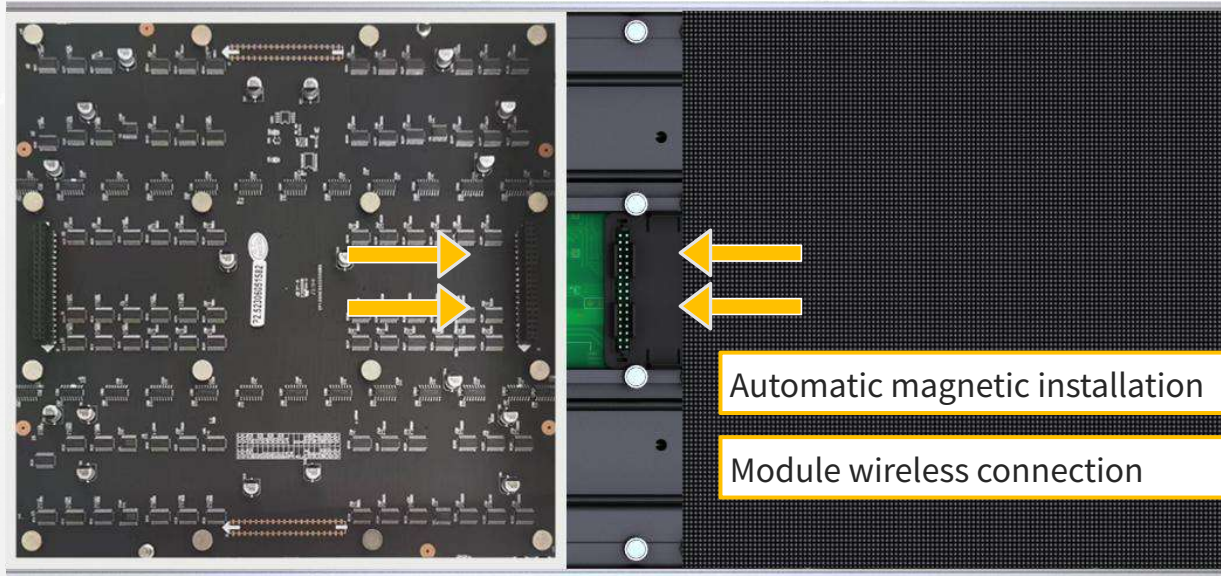

Cabinet

- Modules and cabinet are adsorbed by multiple magnetic columns, which is firm



Magnet assembly

Power supply


Receiver card

Position groove

HUB

Connection between cabinets

Details of cabinet

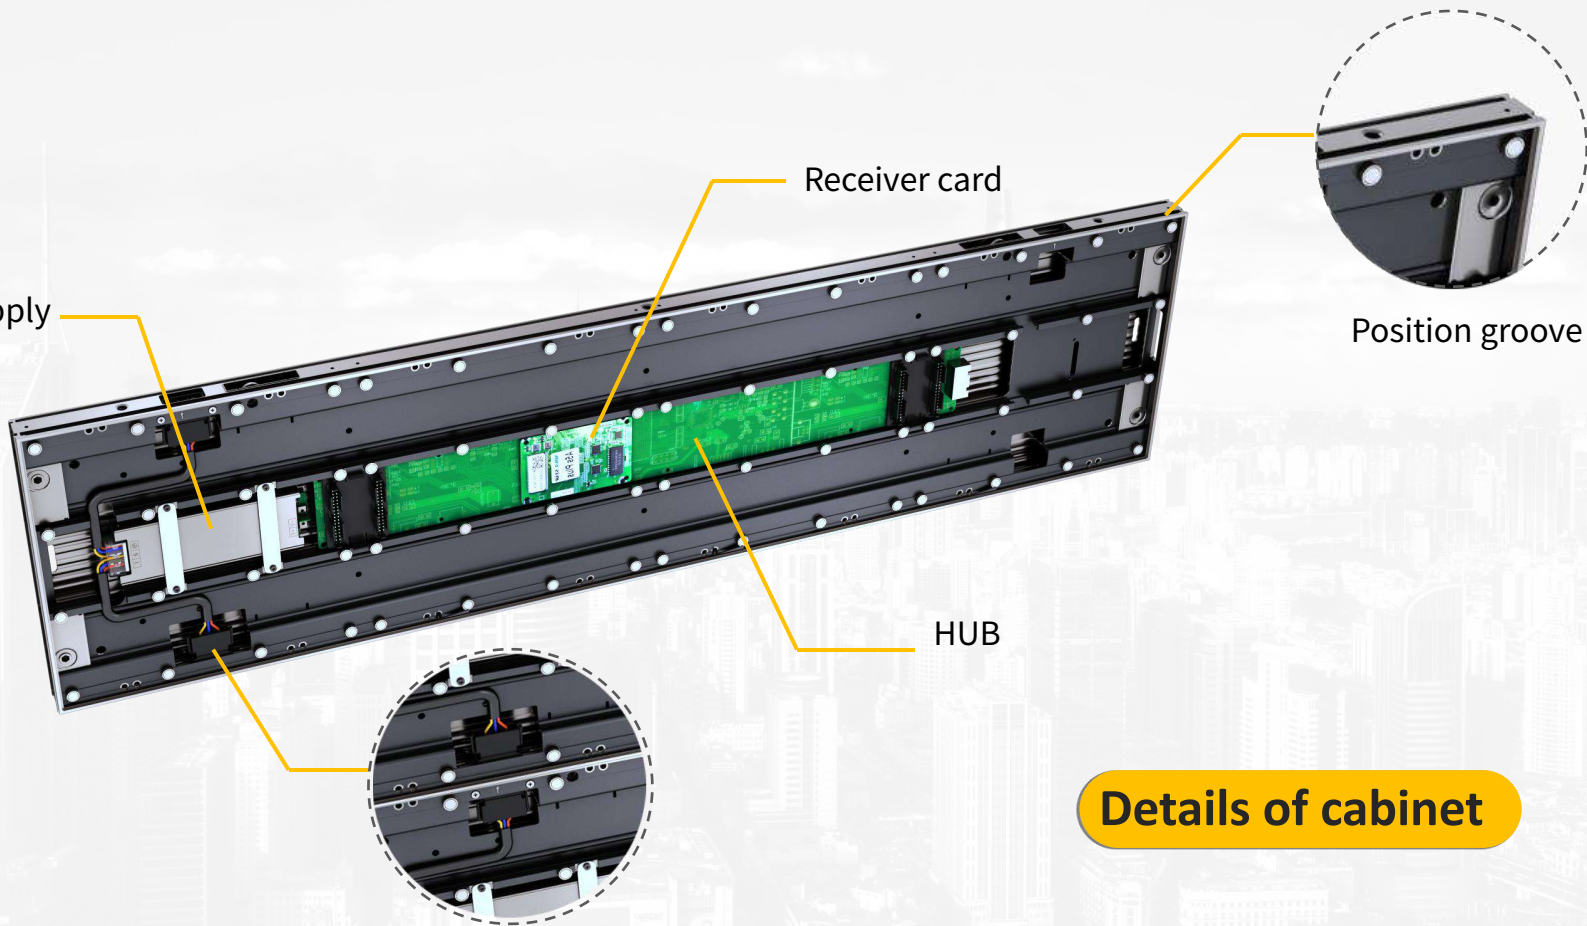

Installation mode



Hanging



Wall mounting



Variety of shapes

160° Super wide viewing angle

Perfect presentation of images from any angle



High refresh rate



High refresh rate



Low refresh rate

High grey scale



Hig grey scale



Low grey scale

Pixel Pitch	P1.25	P1.5625	P1.95	P2.5	P2.604	P2.976	P3.91
LED Type	SMD1010(GOB)	SMD1212(GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD1515
Physical density(Dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Module resolution	200X200	160X160	128X128	100X100	96X96	84X84	64X64
Module dimension(mm)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Panel size(mm)	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33
	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33
	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33
Module quantity(WXH)	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1
Panel resolution	800×200	640×160	512×128	400×100	384×96	336×84	256×64
	600X200	480×160	384×128	300×100	288×96	252×84	192×64
	400×200	320X160	256×128	200×100	192×96	168×84	128×64
Maintenance	Front access	Front access	Front access	Front access	Front access	Front access	Front access
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Single point brightness correction	Have	Have	Have	Have	Have	Have	Have
Brightness(Nits)	600	600	800	800	600-800	800	1000
Color temperature(K)	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional	3200-9300 Optional
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Brightness/Color uniformity	97%	97%	97%	97%	97%	97%	97%
Contrast	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame frequency	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/50 scan	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Gray level	14/16 Optional	14/16 Optional	14/16	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	650	650	650	650	650	650	650
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200	100-200
Protection level	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Power input	AC90-264V,47-63Hz						
Working temperature/humidity(/RH)	-20~60 /10%~85%						
Storage temperature/humidity(/RH)	-20~60 /10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC						

Case gallery





THANKS